

EU type examination certificate
EU-Baumusterprüfbescheinigung

CE-0085CU0034


Product Identification No.
 Produkt-Identnummer

Field of Application <i>Anwendungsbereich</i>	EU Gas Appliances Regulation (EU/2016/426) <i>EU-Gasgeräteverordnung (EU/2016/426)</i>
Owner of Certificate <i>Zertifikatinhaber</i>	Ariston S.p.A. Via Cola, 27, I-60020 Passatempo di Osimo (AN)
Distributor <i>Vertreiber</i>	Ariston S.p.A. Via Cola, 27, I-60020 Passatempo di Osimo (AN)
Product Category <i>Produktart</i>	Boilers with flue systems: Condensing water heater (3202)
Product Description <i>Produktbezeichnung</i>	wall hanging condensing boiler with integrated gas burner in modulating operation method
Model <i>Modell</i>	ALTEAS ONE+ NET ...; GENUS ONE + NET/ WIFI ...
Countries of Destination <i>Bestimmungsländer</i>	AL, AT, BA, BE, BG, CH, CN, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MK, MT, NL, NO, PL, PT, RO, RS, RU, SE, SI, SK, TR, UA
Test Reports <i>Prüfberichte</i>	supplement test: K2487 2021 B10 rev-1 from 27.10.2022 (TRG) supplement test: K2487 2021 E9 rev-1 from 27.10.2022 (TRG)
Test Basis <i>Prüfgrundlagen</i>	EU/2016/426 A III B (09.03.2016) DIN EN 15502-1 (01.02.2022) DIN EN 15502-2-1 (01.09.2017) DVGW CERT ZP 3100 (07.10.2020)

Date of Expiry / File No. 20.02.2029 / 22-0418-GER
Ablaufdatum / AZ

31.10.2022 Pz A-1/2

Date, Issued by, Sheet, Head of Certification Body
 Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle

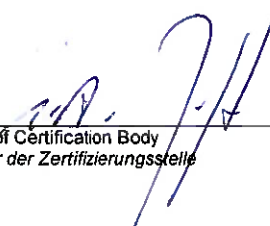


DVGW CERT GmbH
 Zertifizierungsstelle
 Josef-Wirmer-Str. 1-3
 53123 Bonn
 Tel. +49 228 91 88 - 888
 Fax +49 228 91 88 - 993
 www.dvgw-cert.com
 info@dvgw-cert.com

Type Typ	Technical Data Technische Daten	Remarks Bemerkungen
ALTEAS ONE+ NET 24 (CUBE); ALTEAS ONE+ NET 24; GENUS ONE+ NET 24; GENUS ONE+ WiFi 24	sanitary water heat input (Hi): 2,6...26,0 kW nominal heat output: 2,5...21,5 (80/60 °C) kW heat input (Hi): 2,6...22,0 kW	
ALTEAS ONE+ NET 30; GENUS ONE+ NET 30; GENUS ONE+ WiFi 30	sanitary water heat input (Hi): 3,0...30,0 kW nominal heat output: 2,8...27,5 (80/60 °C) kW heat input (Hi): 3,0...28,0 kW	
ALTEAS ONE+ NET 35; GENUS ONE+ NET 35; GENUS ONE+ WiFi 35	sanitary water heat input (Hi): 3,5...34,5 kW nominal heat output: 3,3...30,3 (80/60 °C) kW heat input (Hi): 3,5...31,0 kW	

Hints of Utilization /Remarks

Verwendungshinweise / Bemerkungen

flue types: B23, B23P, B33, C13(x), C23, C33(x), C43(x), C53(x), C63(x), C83(x), C93(x), C10(10)3 and C(11)3 according to installation manual with flue systems of ANT KALIP (0432-CPD-7442), Centrotec (0036 CPR 9169 003), Muelink & Grol (0432-BPR-220556), Skoberne (0036 CPD 9184 001), Gropalli (0694-CPR-7968), LN Natalini (0694-CPR-8045) and POUJOLAT (0071-CPR-0011 and 0071-CPR-11484)

proved countries of destination, appliance categories and supply pressures:

AL, BA, BE, BG, CN, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR HR, IE, IS, IT, LV, MK, MT, NO, PT, RS, RU, SI, UA:
I2N (20mbar)

IT: I12HM3P (17-25 mbar, 25-57,5 mbar)

NL: I2N (20/25 mbar)

AL, AT, BA, BG, IS, IT, LT, MK, MT, RO, RS, RU, SE, SK, TR, UA: I2H (20 mbar)

LU, PL, RO: I2E (20 mbar)

BE: I2E+ (20/25 mbar)

BE: I2E(S) (20/25 mbar)

HU: I2HS (20 mbar); I12HS3B/P (20, 50 mbar)

CN, DK, NO: I12N3B/P (20, 30 mbar)

BA GR, IT, SI: I12N3B/P (20, 37 mbar)

BE: I12N3B/P (20, 30-37 mbar)

BE, ES, FR, PT: I12N3+ (20, 30/37 mbar)

AL, BA, BG, CN, DE, GR, IS, MK, MT, RS, RU, UA: I12N3B/P (20, 50 mbar)

GB: I12N3P (20, 37 and 50 mbar)

NL: I12N3B/P (20/25, 30 and 50 mbar)

AT, EE, FI, RO, SE: I12H3B/P (20, 30 mbar)

FR: I12Esi3B/P (20/25, 30-37 mbar)

CH, CZ, ES, IT, LT, SK: I12H3B/P (20, 37 mbar)

IE: I12H3+ (20, 30/37 mbar)

AL, AT, BG, CH, CY, CZ, HR, IS, LV, MK, MT, RS, RU, SK, TR, UA: I12H3B/P (20, 50 mbar)

RO: I12E3B/P (20, 30 mbar)

PL: I12E3B/P (20, 37 mbar)

PL: I12ELw3B/P (20, 37 mbar)

LU: I12E3B/P (20, 50 mbar)

AT, CN, DK, EE, FI, IS, NL, NO, RO, SE: I3B/P (30 mbar)

BE, ES, FR, IE, PT: I3+ (30/37 mbar)

BA, CH, CZ, GR, LT, SI, SK: I3B/P (37 mbar)

AL, BA, BG, CN, CH, CY, CZ, DE, GR, HR, HU, IT, LU, LV, MK, MT, NL, RS, RU, SK, TR, UA: I3B/P (50 mbar)

GB: I3P (37 and 50 mbar)

The boilers are qualified for the addition of up to 20 vol.-% hydrogen to natural gas (G20) as burning gas according to DVGW CERT ZP 3100.

In the non-EU countries the conformity approval will be accepted if the Gas Appliance Regulation EU/2016/426 is transferred into national law by this countries.


EC type examination certificate
EG-Baumusterprüfbescheinigung

CE-0085CU0034

Product Identification No.
 Produkt-Identnummer

Field of Application <i>Anwendungsbereich</i>	EC Efficiency Directive (92/42/EEC) EG-Wirkungsgradrichtlinie (92/42/EWG)
Owner of Certificate <i>Zertifikatinhaber</i>	Ariston S.p.A. Via Cola, 27, I-60020 Passatempo di Osimo (AN)
Distributor <i>Vertreiber</i>	Ariston S.p.A. Via Cola, 27, I-60020 Passatempo di Osimo (AN)
Product Category <i>Produktart</i>	Boilers with flue systems: Condensing water heater (3202)
Product Description <i>Produktbezeichnung</i>	wall hanging condensing boiler with integrated gas burner in modulating operation method
Model <i>Modell</i>	ALTEAS ONE+ NET ...; GENUS ONE + NET/ WIFI ...
Type of Boiler <i>Heizkesseltyp</i>	condensing boiler
Test Reports <i>Prüfberichte</i>	supplement test: K2487 2021 B11 rev-1 from 27.10.2022 (TRG)
Test Basis <i>Prüfgrundlagen</i>	EU/92/42 (21.05.1992)
File Number <i>Aktenzeichen</i>	22-0418-GWR

31.10.2022 Pz A-1/2
 Date, Issued by, Sheet, Head of Certification Body
 Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle

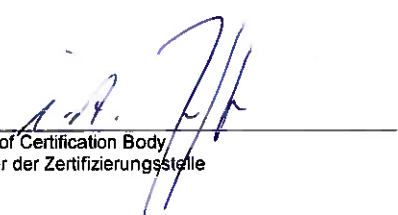


DAkkS
 Deutsche
 Akkreditierungsstelle
 D-ZE-16028-01-04

DVGW CERT GmbH
 Zertifizierungsstelle
 Josef-Wirmer-Str. 1-3
 53123 Bonn
 Tel. +49 228 91 88 - 888
 Fax +49 228 91 88 - 993
 www.dvgw-cert.com
 info@dvgw-cert.com

Type <i>Typ</i>	Technical Data <i>Technische Daten</i>	Energy Labelling <i>Energieeffizienzkennzeichnung</i>
ALTEAS ONE+ NET 24 (CUBE); ALTEAS ONE+ NET 24; GENUS ONE+ NET 24; GENUS ONE+ WiFi 24	sanitary water heat input (Hi): 2,6...26,0 kW nominal heat output: 2,5...21,5 (80/60 °C) kW heat input (Hi): 2,6...22,0 kW	
ALTEAS ONE+ NET 30; GENUS ONE+ NET 30; GENUS ONE+ WiFi 30	sanitary water heat input (Hi): 3,0...30,0 kW nominal heat output: 2,8...27,5 (80/60 °C) kW heat input (Hi): 3,0...28,0 kW	
ALTEAS ONE+ NET 35; GENUS ONE+ NET 35; GENUS ONE+ WiFi 35	sanitary water heat input (Hi): 3,5...34,5 kW nominal heat output: 3,3...30,3 (80/60 °C) kW heat input (Hi): 3,5...31,0 kW	